



BRAVADO HZ REMOTE


Die-cast Aluminum Remote

Project Name: _____ Model Number: _____
Prepared By: _____ Date: _____

FEATURES & BENEFITS

- Die-cast aluminum housing
- Vandal resistant
- 6, 12, or 24V/DC
- Class 1, Division 2, Groups A-D
- Class 2, Division 1, 2; Groups E-G
- T coded T4A
- Performance optics allows up to 70 foot spacing on center
- Clear polycarbonate lens
- Zinc bushing
- Suitable for NEMA 4X and IP66 installations
- Applications: schools, public areas, institutions, apartment complexes
- Operating temperature: +10°C to +40°C
- CSA 22.2 No. 141-15 Performance Certified

DIMENSIONS

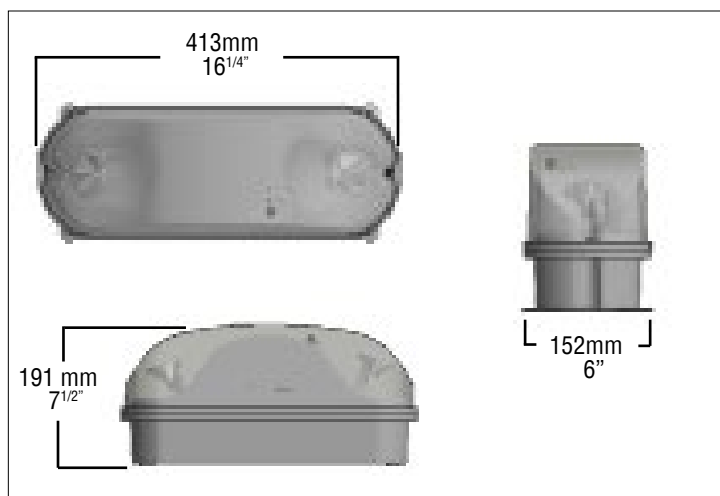

ORDERING GUIDE

BRV-HZ-R - - -

SERIES	OPERATION	LAMP TYPE	OPTIONS
BRV-HZ-R	6 (Volt DC) 12 (Volt DC) 24 (Volt DC)	See Lamp Selection	CC (Custom colour mounting plate) WG (Wireguard)

LAMP SELECTION	6V	12V	24V
LED-MR16	5, 7W	2, 5, 7W	5, 7W

TEMPERATURE CODES

TEMPERATURE CODES CLASS 1, DIV. 2, GROUPS E, F, G	
Lamp	7 Watt LED max
T Code	T4A
TEMPERATURE CODES CLASS 2, DIV. 1 & 2, GROUPS E, F, G	
Lamp	7 Watt LED max
T Code	T4A