


BS101L

EACH MODEL NUMBER CONSISTS OF THE FOLLOWING:
SERIES / OPERATION / LED / COLOUR TEMPERATURE / INPUT

SERIES:	BS101L
OPERATION:	AC ONLY
LED / COLOUR TEMPERATURE:	3K (3000K) 35K (3500K) 4K (4000K) 5K (5000K)
INPUT:	120V TO 277V INPUT

- Labeled wire leads are provided for LINE/ HOT, NEUTRAL/COMMON and GROUND.
- Labels will indicate the rated input voltage: 120V to 277V 60Hz.
- Exact power supply and wiring configuration may differ from image on left: **follow actual wire labels.**

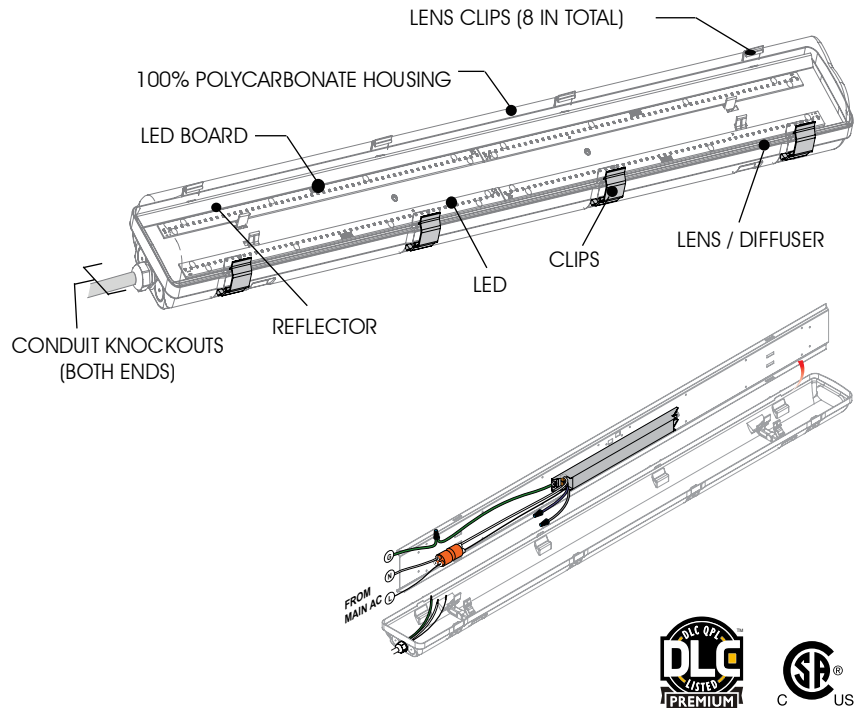

IMPORTANT SAFEGUARDS

When using electrical equipment, basic safety precautions should always be followed including the following:

READ AND FOLLOW ALL SAFETY INSTRUCTIONS.

1. Do not let power cords touch hot surfaces.
2. Do not mount near gas or electric heaters.
3. Equipment should be mounted in locations and at heights where unauthorized personnel will not readily subject it to tampering.
4. The use of accessory equipment not recommended by BeLuce Canada Inc., may cause an unsafe condition, and will void the warranty.
5. Do not use this equipment for other than its intended purpose.
6. Servicing of this equipment should be performed by qualified service personnel.

SAVE THESE INSTRUCTIONS!

First make sure power is turned off before starting the installation!

1. Remove diffuser / lens.
2. Remove the reflector and mounting hardware bag.
3. Install conduit fitting.
4. Securely mount the fixture hardware provided. The fixture can be snapped onto the hardware as illustrated.
5. Prepare fixture for wiring / hang reflector from internal clips.
6. Connect AC supply and ground as labeled on the provided wire leads.
7. CAP unused wire!





WARNING

No user serviceable parts. Refer service to a qualified service technician. Read instructions prior to installing and/or operating this device. Installation should be performed by a licensed electrician/installer in accordance with local codes.


CAUTION! Failure to insulate unused wire may result in a shock hazard or unsafe condition as well as equipment failure. Route wires and secure them in place.

7. Insert LED reflector.
8. Ensure the reflector lip engages the tab channels on the housing before snapping the reflector in position.
9. Install diffuser clips. Reposition the diffuser/lens and snap each of the eight (8) clips into place (a “clack” sound is made).
10. Turn on AC.


Dimensions

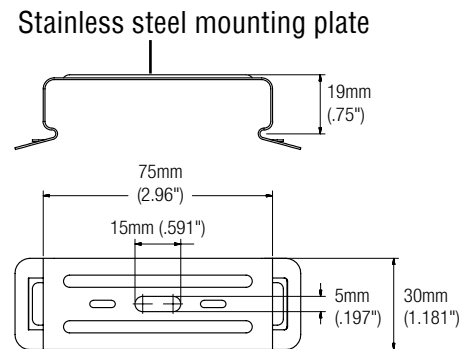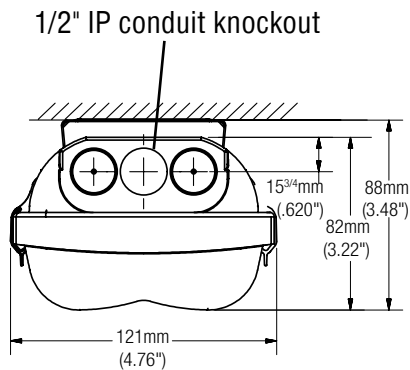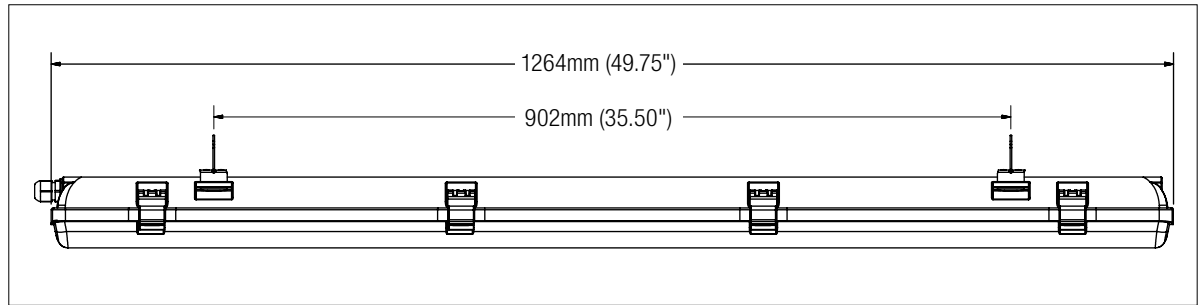


INSTALL MOUNTING HARDWARE

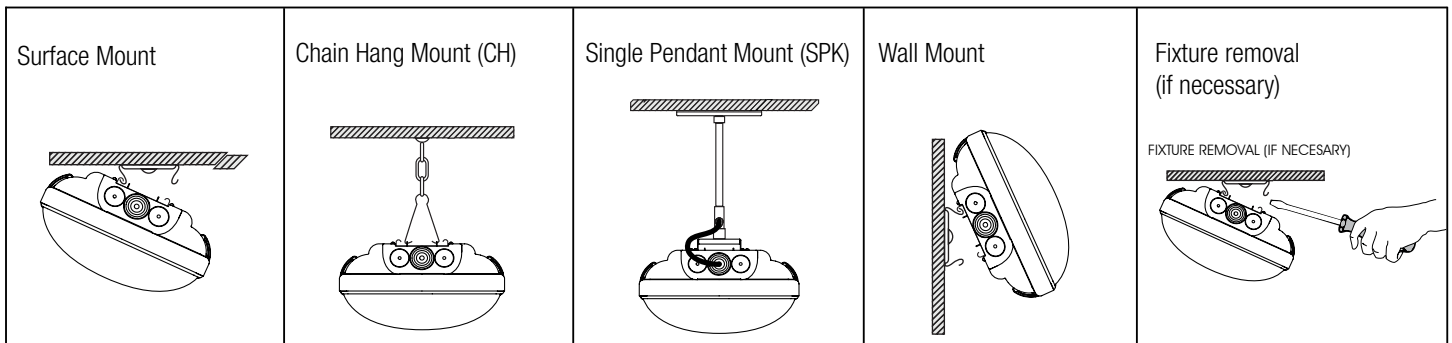


AIRCRAFT CABLE MOUNTING

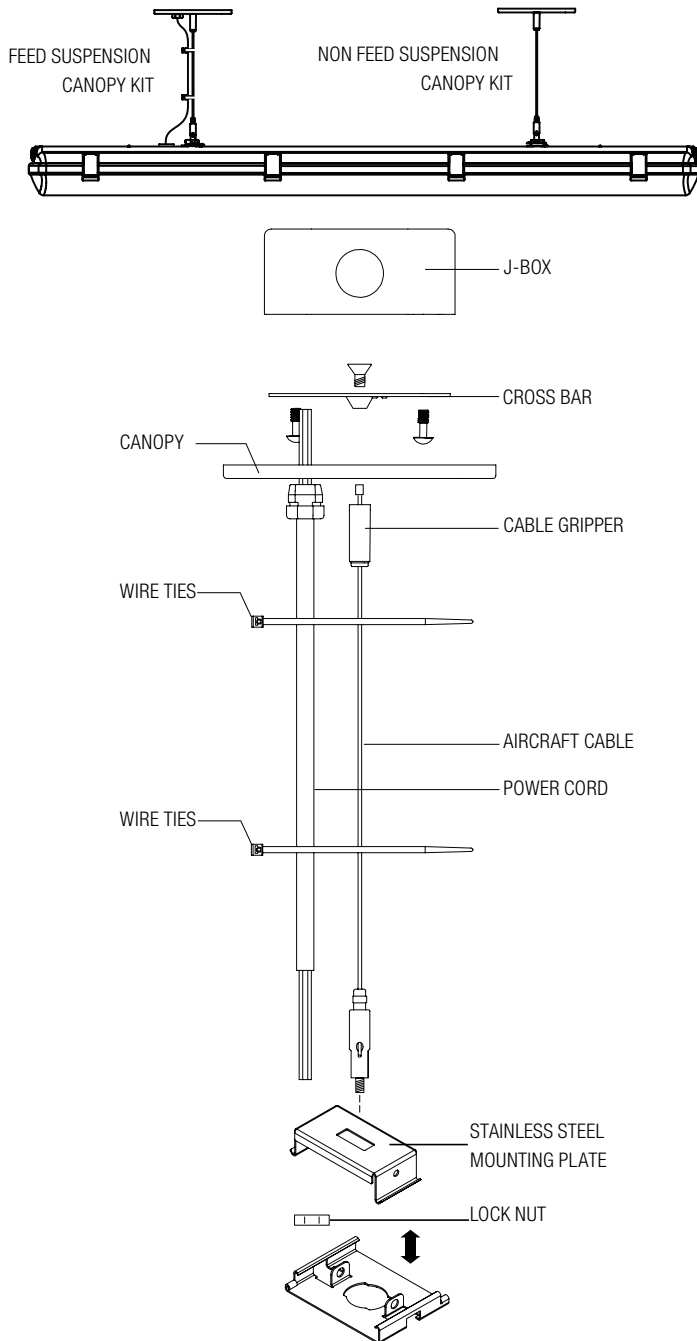


DOUBLE PENDANT MOUNTING

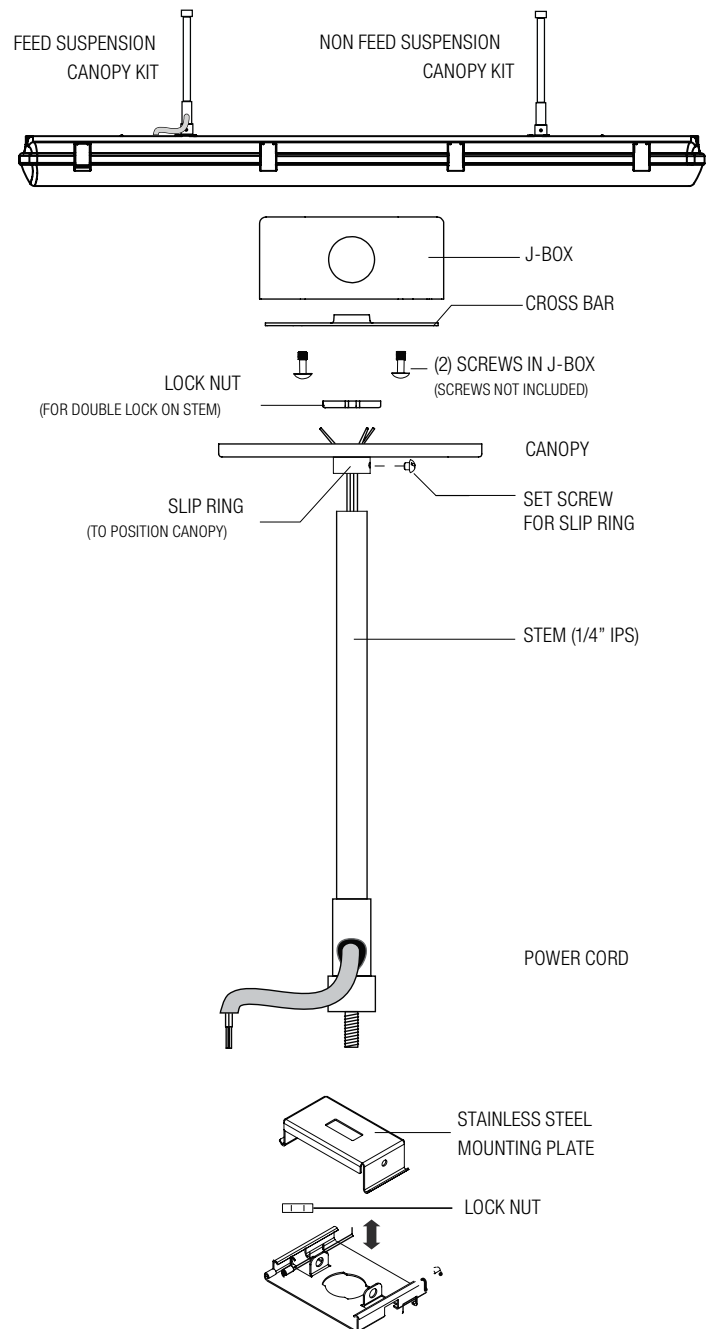


Trunion Mount (TM)

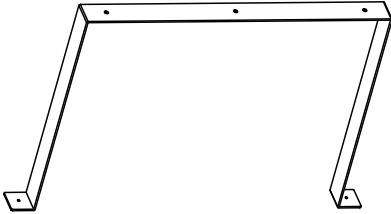

Pivot Mount (PM)

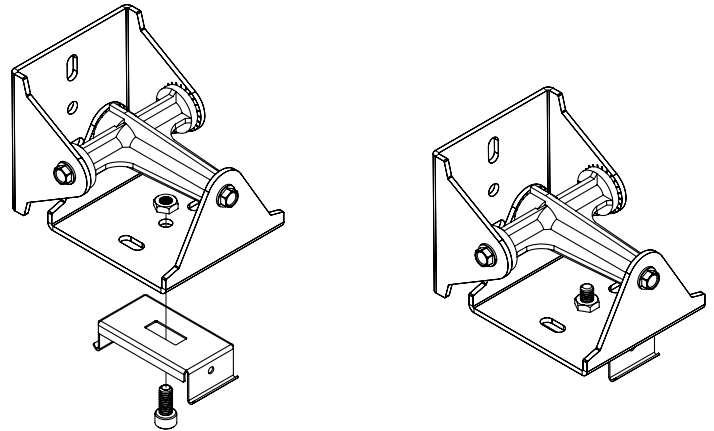

Dimming Wire Diagram

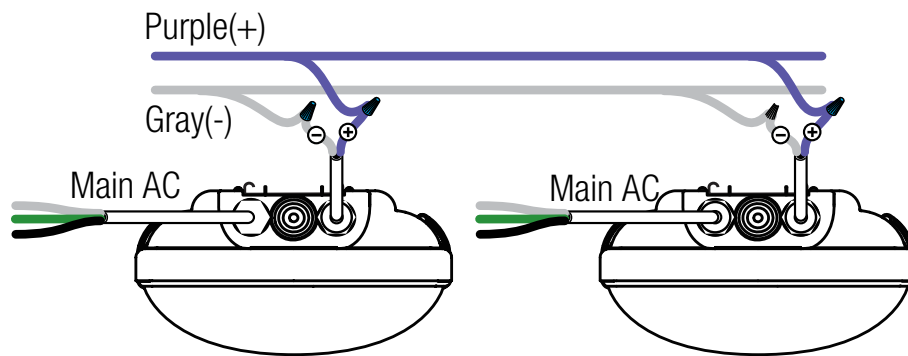

Dimming:

0-10V wall dimmer. For dimmer switch wiring details, please refer to dimmer manufacturer's installation guide.

(Dimmer not supplied by BeLuce)

NOTE: wire locations will vary. Reference wires by colour, not location.

SAVE THESE INSTRUCTIONS!