












Project Name:	Model Number:	
Prepared By:	Date:	

FEATURES & BENEFITS

- → Die-cast aluminum housing
- → Vandal resistant
- 6, 12, 24 or 120VAC/DC
- Performance optics allows up to 90 foot spacing on center
- Clear polycarbonate lens
- Suitable for NEMA 4X and IP66 installations
- Applications: schools, public areas, institutions, apartment complexes
- → Operating temperature: +10°C to +40°C
- CSA 22.2 No. 141-15 Performance Certified

DIMENSIONS

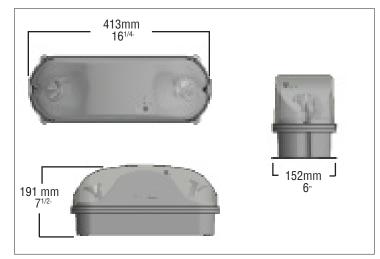

ORDERING GUIDE

BRV-R

SERIES	OPERATION	LAMP TYPE	OPTIONS
BRV-R	6 (Volt DC) 12 (Volt DC) 24 (Volt DC) 120VAC/DC	See Lamp Selection	CC (Custom colour mounting plate) WG (Wireguard)

LAMP SELECTION	6V	12V	24V	120V
LED-MR16	5, 7W	2, 5, 7W	5, 7W	N/A
LED-GU10	N/A	N/A	N/A	7W

