



QUADRALUCE RM


Extruded Aluminum Running Man LED Combo

Project Name: _____ Model Number: _____
Prepared By: _____ Date: _____

FEATURES & BENEFITS

- Wall, ceiling or end mounting
- 3 interchangeable lenses for different light distribution
- High-output LED technology with constant light output level
- Integrated test button & LED indicator
- 2-wire universal AC input of 120-347 VAC 60Hz
- 4 x 2.5W LEDs 4000K
- Constructed of sturdy extruded aluminum
- Operating temperature: +10°C to +40°C
- CSA 22.2 No. 141-15 Performance Certified

DIMENSIONS

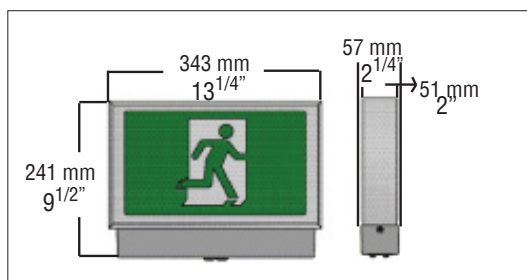

AC INPUT RATINGS

VOLTAGE (VAC)	WATTAGE (W)	RATED CURRENT (A)
120/277/347	6.0/6.5/8.6	0.15/0.075/0.10

ORDERING GUIDE


QR-RM-PL - - - - -

SERIES	VOLTS	LIGHT SOURCE	FACE#	PICTOGRAM	MOUNTING	OPTIONS
QR-RM-PL	12-10	L (LED)	1 (Single) 2 (Double) 2U (Universal)	OLR (Universal pictograms) O (No indicators) L (Left indicator) R (Right indicator) D (Down indicator) U (Up indicator) UR (45° up right) DR (45° down right) UL (45° up left) DL (45° down left)	3W (Wall) C (Ceiling) M (Universal)	CC (Custom colour - specify) WG (Wireguard) PK12 (12" pendant) AT (Auto-test) TP (Tamper proof screws) 90MIN (90 min. emergency) 120MIN (120 min. emergency)


NOTE: ¹Two pictograms or OLR must be specified; ²Specify OLR pictogram; ³Single face only.

LENS DISTRIBUTION PATTERNS


Ceiling Symmetrical

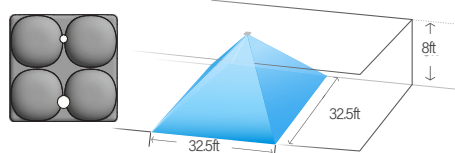

Wall Forward

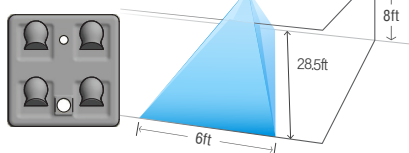

Wall Wide

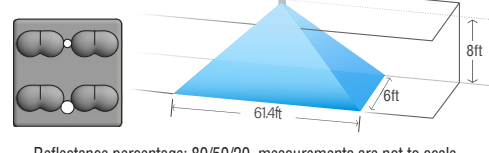

Reflectance percentage: 80/50/20, measurements are not to scale

LED TECHNOLOGY

The **QUADRALUCE** is illuminated with four 2.5W Samsung LEDs. The **QUADRALUCE** delivers up to 900 lumens. Each pair of LEDs are laid out in parallel on the LED module so if one pair fails, the other will remain illuminated. A high-efficiency LED driver is used to maintain a constant output current to all LEDs. The LEDs are rated for >54,000 hours at L80.

BATTERY TECHNOLOGY

The **QUADRALUCE** comes standard with a Ni-Cd battery pack that provides a minimum of 30 minute emergency duration. Optional 90 or 120 minute run time is available.

BELUCE AUTO-TEST (AT)

The system automatically performs one 5 minute discharge test monthly and every 6 months it performs two full discharge tests, 24 hours apart. This tests both full battery capacity and recharge capability. A manual Test feature is included when the Auto-test option is selected. The manual test will run a 30 second, 15 minute or 90 minute test by pressing the correct sequence of the test switch.

UNIVERSAL PICTOGRAMS

The OLR(Universal) option includes: a pictogram with no directional indicators, a pictogram with a left facing directional indicator and a pictogram with a right facing directional indicator.

