



ROBUSTO COMBO RM


Fiberglass Hazardous Running Man Combo

Project Name: _____ Model Number: _____
 Prepared By: _____ Date: _____

FEATURES & BENEFITS

- Weather proof PAR36 heads are standard
- Hazardous location certified for Class I, Div. 2, Groups A-D, Temperature Code T2B (T4 for LED)
- Hinged door for trouble-free installation and maintenance
- Fully gasketed NEMA 4X fiberglass housing
- Magnetic test switch
- Stainless steel breather for safe and effective ventilation
- LED is standard with 120/347VAC input
- Operating temperature: +10°C to +40°C
- CSA 22.2 No. 141-15 and C22.2 No. 137M performance certified

DIMENSIONS

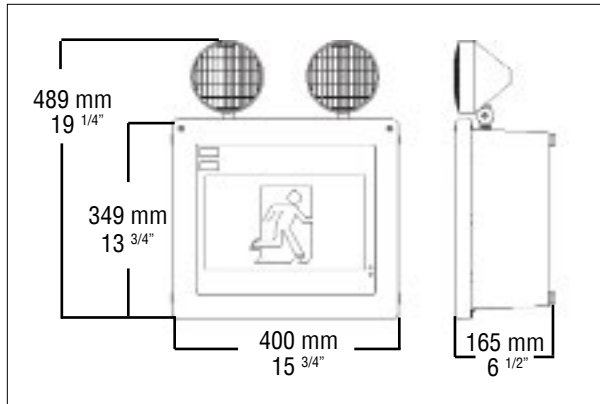

LAMP SELECTION

	6V	12V
Composite Tungsten	9W	9, 12, 18W
Quartz (Q)	12W	12, 20 (55W PAR36 only)
Sealed Beam (LED)	N/A	6W

(ONLY PAR36 STYLE HEADS AVAILABLE)

ORDERING GUIDE

RBO-C-RM- - - - - - - - - -

SERIES	OPERATION	CAPACITY	LED	FACE #	PICTOGRAM	MOUNTING	HEADS	LAMP	OPTIONS
RBO-C-RM	6 (6VDC) 12 (12VDC)	See model rating guide	L (LED)	1 (Single)	OLR (Universal pictograms) O (No indicators) L (Left indicator) R (Right indicator) D (Down indicator) U (Up indicator) UR (45° up right) DR (45° down right) UL (45° up left) DL (45° down left)	W (Wall)	0 1LRWP 2LRWP 3LRWP 4LRWP	See lamp guide	TD (Time delay - specify 5, 10, 20 mins) AT (Auto-test) SM (Side mount heads) TP (Tamper proof) WG (Wireguard) TC (Teflon® coated lens) A (Ammeter) V (Voltmeter) FAI (Fire alarm interface - specify) SW-OL (RM no indicator, left)

NOTE: ¹Specify AC input voltage; ²Specify open/closed/6-24 VAC

EXTERNAL SPECIFICATIONS

The lightweight NEMA 4X fiberglass enclosure is corrosion and vandal resistant. The housing is fully gasketed for hazardous location applications and is supplied standard in an industrial grey finish. The ROBUSTO-C sign can be surface mounted on a wall. This sign comes in a single face version only. The combo version comes standard with an external LED status indicator and magnetic test switch.

BATTERY TECHNOLOGY

The ROBUSTO-C is designed with maintenance free, sealed lead acid batteries providing a minimum emergency duration of 30 minutes.

UNIVERSAL PICTOGRAMS

The OLR(Universal) option includes: a pictogram with no directional indicators, a pictogram with a left facing directional indicator and a pictogram with a right facing directional indicator.

BELUCE AUTO-TEST (AT)

The system automatically performs one 5 minute discharge test monthly and every 6 months it performs two 30 minute discharge tests, 24 hours apart. This tests both full battery capacity and recharge capability.

MODEL RATING GUIDE

MODEL	VOLTAGE (OUTPUT)	WATTAGE RATING 30MIN
RBO-C-RM-6-36	6	36
RBO-C-RM-6-50	6	50
RBO-C-RM-6-80	6	80
RBO-C-RM-6-90	6	90
RBO-C-RM-6-100	6	100
RBO-C-RM-6-160	6	160
RBO-C-RM-12-36	12	36
RBO-C-RM-12-50	12	50
RBO-C-RM-12-72	12	72
RBO-C-RM-12-90	12	90
RBO-C-RM-12-120	12	120
RBO-C-RM-12-150	12	150
RBO-C-RM-12-180	12	180