

INSTRUCTIONS IMPORTANT SAFEGUARDS

1. READ AND FOLLOW ALL SAFETY INSTRUCTIONS


2. Disconnect power before performing work on electrical equipment.
3. Do not let power cords touch hot surfaces and do not mount near gas or electric heaters.
4. Use caution when servicing batteries. Battery acid can cause burns to skin and eyes. If acid is spilled on skin or eyes, flush with fresh water and contact a physician immediately.
5. Equipment should be mounted in locations and/or at heights where unauthorized personnel will not readily subject it to tampering.
6. The use of replacement parts or accessory equipment not furnished by BeLuce, may cause equipment failure and will void the warranty.
7. Do not use this equipment for other than its intended purpose.
8. Servicing of this equipment should be performed by qualified service personnel.

9. SAVE THESE INSTRUCTIONS!


INSTALLATION

1. Product is heavy! Mount the unit securely using appropriate mounting hardware (supplied by others) which will sustain the product's weight.
2. Connect and seal appropriately rated conduit to the wire-access hole, and route necessary wires through.
3. Open inspection hole and make DC electrical connections.
4. Voltage rating on product label must match output DC voltage rating of connected emergency battery unit.
5. CAUTION: Ensure correct polarity, check wire labels
6. Close inspection hole.
7. Turn ON DC source to test lamps.


Note: lamp head differs based on hazardous classification




Wall mount



Ceiling mount



Pendant mount

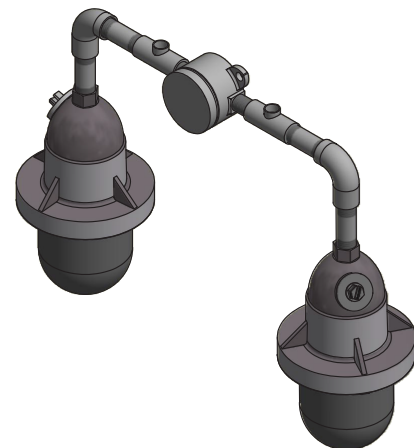

Double (2XF)

SAVE THESE INSTRUCTIONS